


MINOR OR COLLECTOR STREET

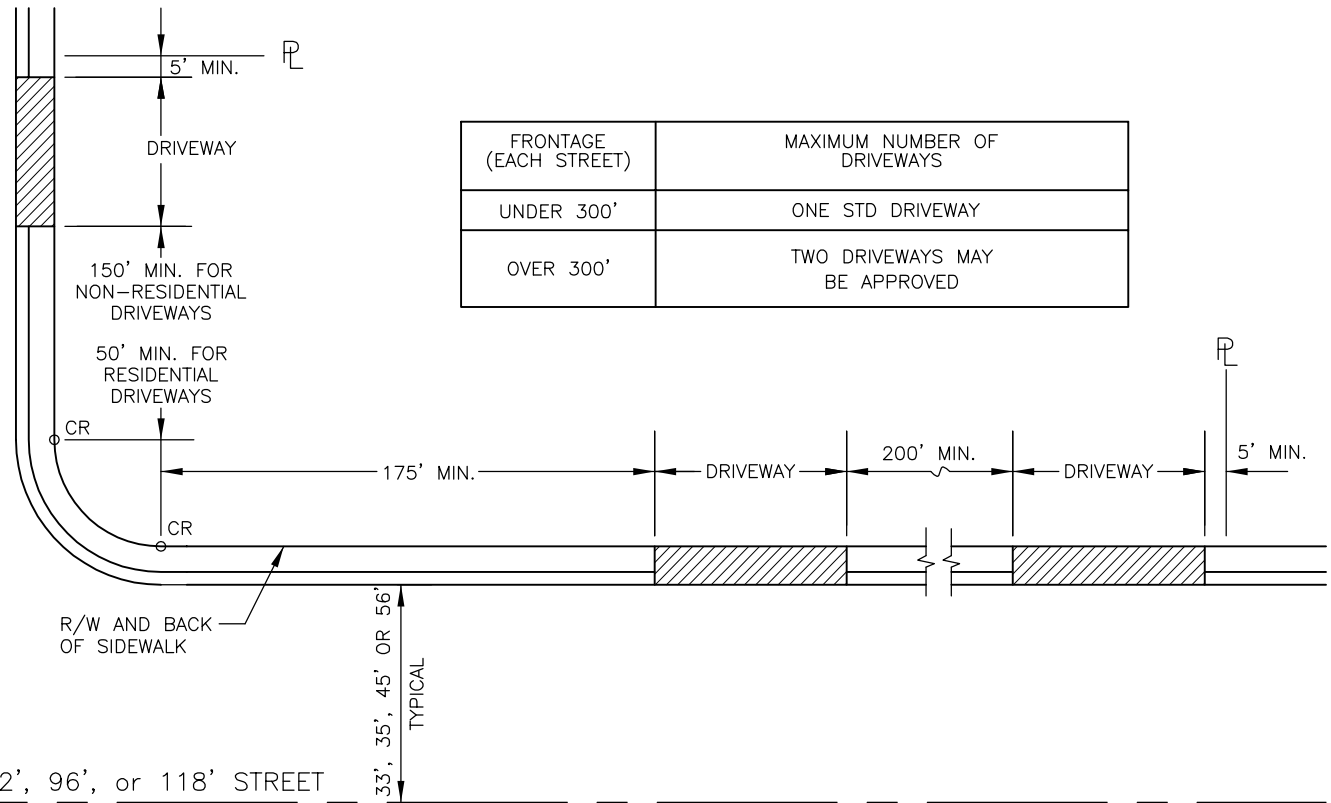

NOTES:

1. DRIVEWAYS ON 72', 96', AND 118' STREETS SHALL HAVE A MINIMUM CLEAR SPACING OF 200' BETWEEN DRIVEWAYS. LESSER SPACING MAY BE APPROVED BY THE DIRECTOR FOR SMALL LOTS WHERE A MINIMUM OF ONE DRIVEWAY PER STREET FRONTAGE WILL BE APPROVED.
2. FOR ADDITIONAL DRIVEWAY REQUIREMENTS SEE SECTION 4-10 OF THE CITY IMPROVEMENT STANDARDS.

72', 96', or 118' STREET

DATE: 02/12/2007		NOT TO SCALE	
REVISION	BY	APPROVED	DATE

CITY OF ELK GROVE - PUBLIC WORKS

**DRIVEWAY LOCATION STANDARDS**

APPROVED BY: \_\_\_\_\_

CITY ENGINEER

DRAWING NUMBER

**ST - 22**

