


NOTES:

1. DRIVEWAY WIDTH AS PER CITY CODE.
2. WEAKENED PLANE JOINTS (WPJ) REQUIRED ON CENTERLINE FOR DRIVEWAYS 10' TO 20' WIDE DRIVEWAYS 22' TO 35' WIDE SHALL HAVE TWO WPJ EVENLY SPACED AT 1/3 AND 2/3 POINTS.
3. THICKNESS OF APRONS SHALL BE 6".

* SECTION 4-10

** IF CURB & GUTTER ARE Poured SEPARATE OF APRON THEN DOWELS ARE REQUIRED AT BACK OF CURB.

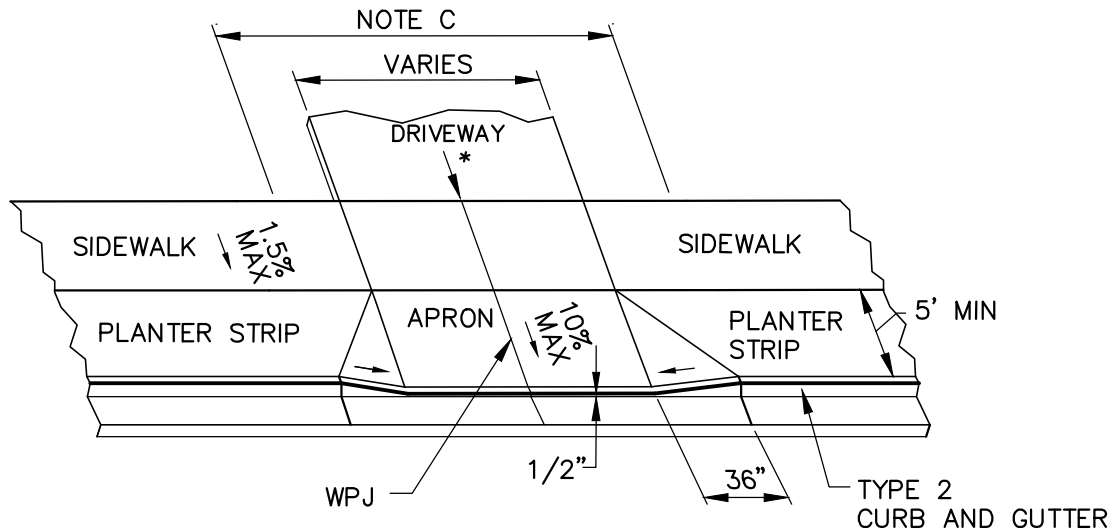

DATE: 09/22/2017		NOT TO SCALE	
REVISION	BY	APPROVED	DATE
1	LM	TW	07-18-2019

CITY OF ELK GROVE - PUBLIC WORKS

**DETACHED SIDEWALK
DRIVEWAY DETAIL**

APPROVED BY:
Paul M. ... 1/16/2020
CITY ENGINEER DATE

DRAWING NUMBER
AR - 4.8

