

8401 LAGUNA PALMS WAY • ELK GROVE, CALIFORNIA 95758 TEL: 916.683.7111 • FAX: 916.691.2001 • www.elkgrovecity.org

PUBLIC WORKS DEPARTMENT

Modification of or Addition to Improvement Standards and Details

Modification Number:

082506-1

Effective Date of Change:

August 25, 2006

Modification:

Modify the standard Roadway and Trench Backfill Standard.


- Replace the typical trench detail with the attached backfill standard drawing labeled ST-8.
- Under the section titled, "Intermediate Zone Backfill", subsection 1. Compaction, paragraph 1, revise the sentence, "All subsequent backfill..." to read, "...achieve a minimum of 93% of the ASTM D1557 maximum dry density."
- Under the section titled, "Subgrade Soils Roadway, Curb and Gutter, and Sidewalks, subsection 1 Subgrade Preparation, revise the sentence, "However, all material placed...", to read, "...the undercut shall be compacted to at least 93 percent of the ASTM D1557 maximum dry density..."

Effect of Modification:

Modification to Improvement Standards Approved:

Modification lowers the compaction requirement for the intermediate zone and trench undercut in roadways from 95% to 93%.

Request for Modification Initiated By:	In/ Ink	8-29.d
		Date
Modification Reviewed for Conformity and Consistency to Standards:	FRO	90119
	Manager - Development Engineering	Date

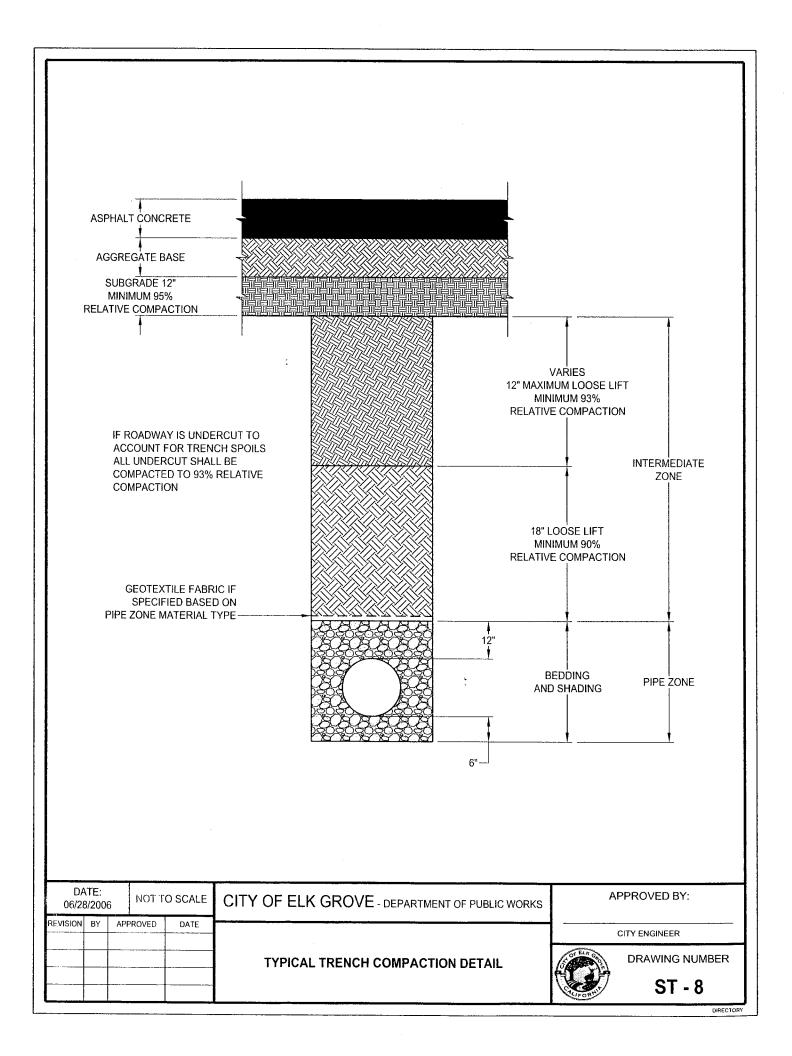



8401 LAGUNA PALMS WAY • ELK GROVE, CALIFORNIA 95758 TEL: 916.683.7111 • FAX: 916.691.2001 • www.elkgrovecity.org

PUBLIC WORKS DEPARTMENT

Modification of or Addition to Improvement Standards and Details

Modification Number:	082806-1	

Effective Date of Change: August 28, 2006

Delete Section 9-12.A.iv of the improvement standards.

Effect of Modification:

This modification to the standards will no longer allow HDPE pipe to be used in public improvements.

Request for Modification Initiated By:

8-29-06

Modification Reviewed for Conformity and Consistency to Standards:

Manager - Development Engineering

01/0k

Modification to Improvement Standards Approved:

City Engineer

1/5/04 Date