


SECTION A-A

NOTES:

- A. DRIVEWAY WIDTH AS PER CITY CODE.
- B. WEAKENED PLANE JOINTS (WPJ) REQUIRED ON CENTERLINE FOR DRIVEWAYS 10' TO 20' WIDE. DRIVEWAYS 22' TO 35' WIDE SHALL HAVE TWO WPJ EVENLY SPACED AT 1/3 AND 2/3 POINTS.
- C. THICKNESS OF APRONS SHALL BE 6" ON RESIDENTIAL DRIVEWAYS AND 6" ON COMMERCIAL DRIVEWAYS.
- D. APRON WILL BE DEPRESSED ON CURB AND GUTTER WHEN RECONSTRUCTING EXISTING COMMERCIAL DRIVEWAYS.
- * SEE SECTION 4-10
- ** IF CURB & GUTTER ARE Poured SEPARATE OF APRON THEN DOWELS ARE REQUIRED AT BACK OF CURB.

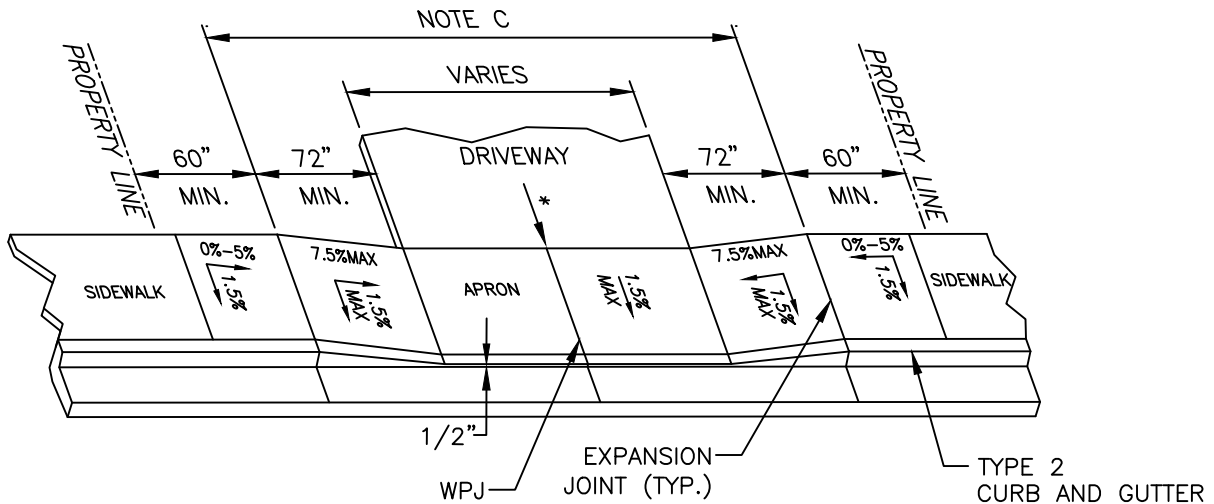

DATE: 09/22/2017		NOT TO SCALE	
REVISION	BY	APPROVED	DATE

CITY OF ELK GROVE - PUBLIC WORKS

SIDEWALK DRIVEWAY DETAIL

APPROVED BY:
Robert M. ...
CITY ENGINEER
10/24/2018
DATE



DRAWING NUMBER

AR - 4.7